



Cardboard Recycling Cargo Trailer General Specifications

Effective 4/1/2009

Standard Trailer Features:

Box width: 6'

Box length: 12' plus 2' v-nose

Interior height: 5'6"

Steel mainframe construction

- - - Mainframe is coated with DuPont Corlar Primer & Imron 5000 polyurethane enamel

Aluminum Roof

Aluminum exterior skin

Aluminum tread plate floor

Aluminum lined interior walls

Spring loaded access door for loading cardboard (1 per side)

- - -ADA compliant 54" fill height

Front entry door in v-nose

Swing out cargo doors in rear w/padlock provision

(1) Crank up roof vent

7,000# GVWR

- (2) 3,500# Dexter Axles
- Torsion suspension
- ST205 75R 14 radial tires
- 5.5" x 14" steel rims w/5 on 4.5" bolt pattern
- Electric brakes

DOT approved LED light package

Soldered and shrink wrapped wiring

2,000# tongue jack w/caster wheel

2" Ball coupler

27" safety chains

7 prong RV style light plug

Options

5' Box Width (In lieu of standard 6')

8' or 14' Box Length (In lieu of standard 12')

5' or 6' Interior height (in lieu of standard 5'6")

Hydraulic surge brakes

Single axle


7,000# tongue jack

Rear Stabilizer jacks

Interior Lights

Rubber wheel chocks & holders

Can Custom Build to Your Specification

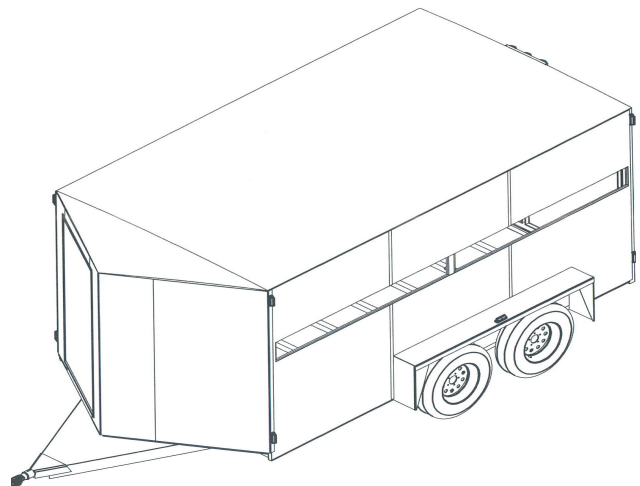

Kiefer Industrial Trailers
Green Initiative
P.O. Box 88
Kanawha, IA 50447
1-888-254-3337 ext. 23

* Specifications Subject To Change